

DrägerSensor® XXS HCN

Order no. 68 10 887

Used in	Plug & Play	Replaceable	Guaranty	Expected sensor life
Dräger Pac 7000	no	yes	1 year	> 1.5 years
Dräger X-am 5000	no	yes	1 year	> 1.5 years
Dräger X-am 5600	no	yes	1 year	> 1.5 years

Selective filter

B2X (6812424) – replaceable.

Cross sensitivities to hydrogen sulfide (H₂S) and sulfur dioxide (SO₂) are eliminated.

The filter's service life can be calculated as follows: 1,000 ppm x hours of contaminant gas. Example: Given constant concentration of 10 ppm H₂S will be: Service life = 1,000 ppm x hours / 10 ppm = 100 hours. The measurement value response time increases after the installation of the filter.

MARKET SEGMENTS

Metal processing, mining, fumigation and pest control, chemical warfare agent (blood agents).


TECHNICAL SPECIFICATIONS

Detection limit:	0.5 ppm
Resolution:	0.1 ppm
Measurement range/ relative sensitivity	0 to 50 ppm HCN (hydrogen cyanide)
Response time:	≤ 10 seconds (T ₅₀)
Measurement accuracy	
Sensitivity:	≤ ± 5% of measured value
Long-term drift, at 20°C (68°F)	
Zero point:	≤ ± 2 ppm/year
Sensitivity:	≤ ± 5% of measured value/month
Warm-up time:	≤ 15 minutes
Ambient conditions	
Temperature:	(-20 to 50)°C (-4 to 122)°F
Humidity:	(10 to 90)% RH
Pressure:	(700 to 1,300) hPa
Influence of temperature	
Zero point:	≤ ± 1 ppm
Sensitivity:	≤ ± 5% of measured value
Influence of humidity	
Zero point:	No effect
Sensitivity:	≤ ± 0.1% of measured value/% RH
Test gas:	approx. 1 to 45 ppm HCN


SPECIAL CHARACTERISTICS

This sensor's extremely quick response time and excellent repeatability provides a fast and reliable warning against Prussic acid (hydrogen cyanide).

Sensor reaction to HCN at 20 °C/68 °F
Flow = 0.5 l/min, 20 ppm HCN

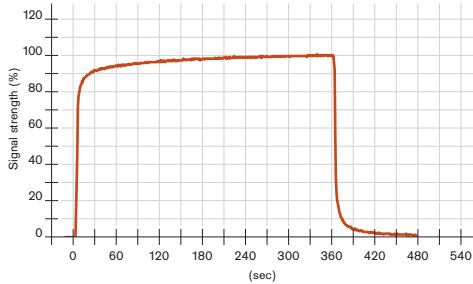

Repeatability of HCN sensors with mit 10 ppm HCN

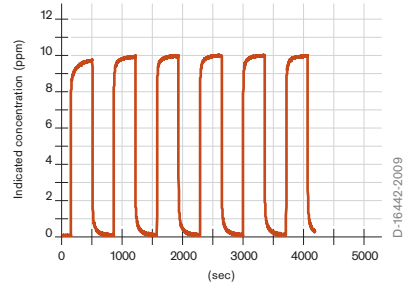

The values shown in the following table are standard and apply to new sensors. The values may fluctuate by $\pm 30\%$. The sensor may also be sensitive to additional gases (for more information, please contact Dräger). Gas mixtures may be displayed as the sum of all components. Gases with a negative cross sensitivity may displace an existing concentration of HCN. To be sure, please check if gas mixtures are present.

RELEVANT CROSS-SENSITIVITIES

Gas/vapor	Chem. symbol	Concentration	Display in ppm HCN
Ammonia	NH ₃	50 ppm	No effect
Carbon dioxide	CO ₂	10 Vol.-%	No effect
Carbon monoxide	CO	200 ppm	No effect
Chlorine	Cl ₂	10 ppm	≤ 20 (-)
Ethanol	C ₂ H ₅ OH	250 ppm	No effect
Ethine	C ₂ H ₂	100 ppm	≤ 10
Hydrogen	H ₂	1.5 Vol.-%	≤ 10
Hydrogen chloride	HCl	20 ppm	≤ 1
Hydrogen sulfide	H ₂ S	20 ppm	≤ 50
Isobutylene	(CH ₃) ₂ CCH ₂	100 ppm	≤ 1.5
Methane	CH ₄	1 Vol.-%	No effect
Nitrogen dioxide	NO ₂	10 ppm	≤ 20 (-)
Nitrogen monoxide	NO	20 ppm	No effect
Ozone	O ₃	0.5 ppm	No effect
Phosphine	PH ₃	1 ppm	≤ 8
Sulfur dioxide	SO ₂	20 ppm	≤ 10

(-) Indicates negative deviation